

FLOOR PLAN


SCALE 1/4" = 1'-0"

1173 SQ. FT. HEATED AREA

DOOR SCHEDULE			
MARK	SIZE	DESCRIPTION	#REQ
1	3'0" x 6'8"	EXTERIOR SOLID CORE	2
2	2'6" x 6'8"	INTERIOR HOLLOW CORE	5
3	2'3" x 6'8"	BI-FOLD	8
4	2'0" x 6'8"	BI-FOLD	2

WINDOW SCHEDULE			
MARK	SIZE	DESCRIPTION	#REQ
A	3'6" x 4'2"	WOOD DOUBLE HUNG	9
B	2'0" x 3'0"	WOOD DOUBLE HUNG	2
C	3'6" x 3'0"	WOOD DOUBLE HUNG	1

USE INSULATED GLASS FOR ALL WINDOWS

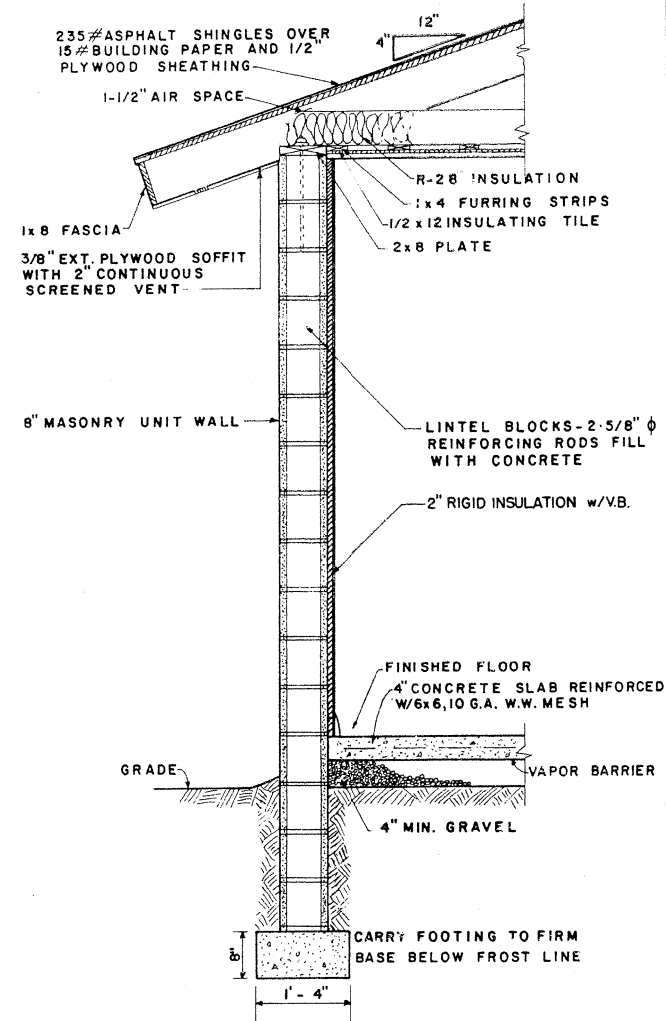

TYPICAL WALL SECTION

SCALE 3/4" = 1'-0"



PERSPECTIVE VIEW


(NOT TO SCALE)




3 BEDROOM FARMHOUSE

USDA. 64 7170 SHEET 1 OF 2

REV. 85

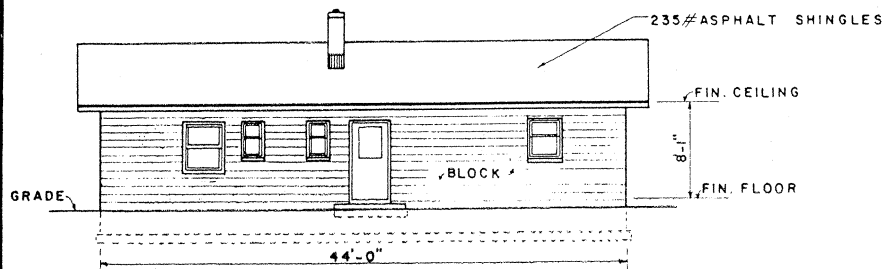


REAR ELEVATION

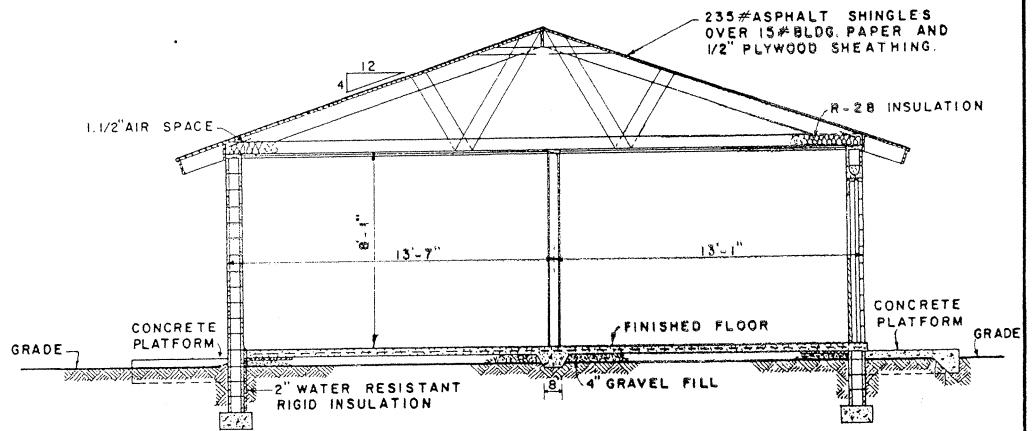


SECTION A-A

SCALE 1/4" = 1'-0"

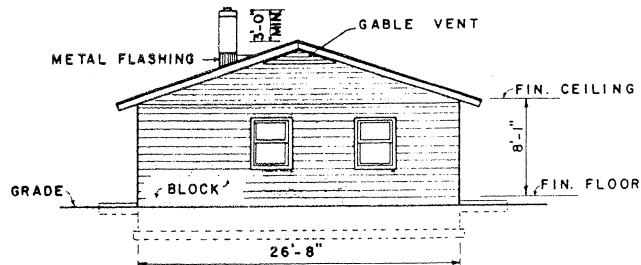


LEFT ELEVATION

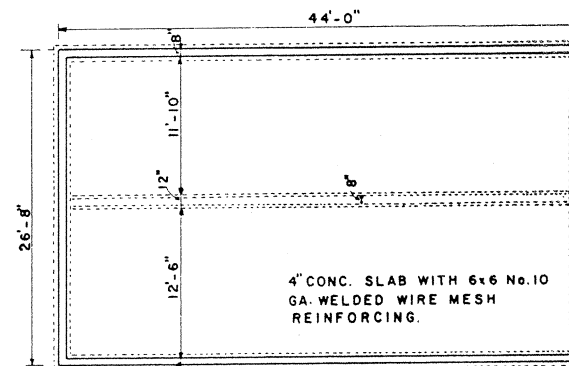


FOUNDATION PLAN

SCALE 1/8" = 1'-0"

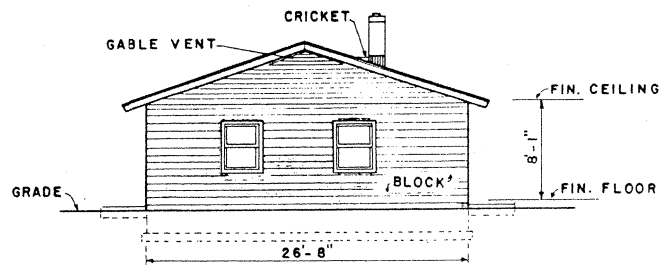


RIGHT ELEVATION

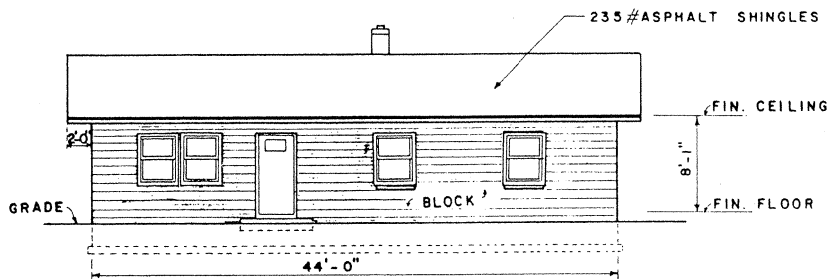

FRONT ELEVATION

ELEVATIONS



SCALE 1/8" = 1'-0"

CONSTRUCTION CHECK LIST

1. CHECK LOCAL BUILDING CODE AND LOAN COMPANY CRITERIA. PURCHASE TRUSSES ACCORDING TO LOCAL SNOW LOAD CRITERIA.
2. ADEQUATELY NAIL AND ANCHOR JOINTS.
3. USE EXTERIOR GLUED PLYWOOD WHEREVER IT MAY BE WETTED DURING OR AFTER CONSTRUCTION.
4. PRESSURE TREAT ALL WOOD WITH GROUND CONTACT AND PROVIDE OTHER NEEDED TERMITE CONTROL.
5. R VALUES DEPEND ON LOCAL CLIMATE AND FUEL COSTS.
6. PROVIDE 1 SQ. FT. OF ATTIC VENT OPENINGS FOR EACH 150 SQ. FT. OF CEILING.
7. WEATHERIZE ALL OPENINGS AND JOINTS.



3 BEDROOM FARMHOUSE

U.S.D.A. 64

7170

SHEET 2 OF 2

REV. 85