


LINE OR HAND LEVEL MOUNTED
PARALLEL TO TOP BOARD SURFACE
TOP VIEW

No. 6 ROUND HEAD
ZINC COATED WOOD
SCREW, 1" LONG,
SLOTTED HEAD

3/16" SLOTTED, ROUND HEAD
ZINC COATED BOLT, 2" LONG
WITH WING NUT & TWO FLAT
ZINC COATED WASHERS. DRILL
1/4" HOLES FOR BOLT.

1 1/2 x 5" PLYWOOD
1/4" THICK FOR RULER
CLAMP.

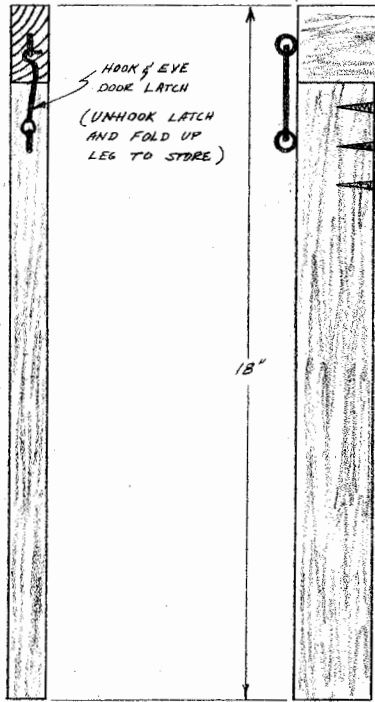

HOOK & EYE
DOOR LATCH
(UNHOOK LATCH
AND FOLD UP
LEG TO STORE)

18"


HINGE
1x2

SIDE VIEW

STEPS:

1. LEVEL BAR.
2. TAKE MEASUREMENT.
3. DETERMINE SEED DEPTH (18" - MEASUREMENT).

END VIEW

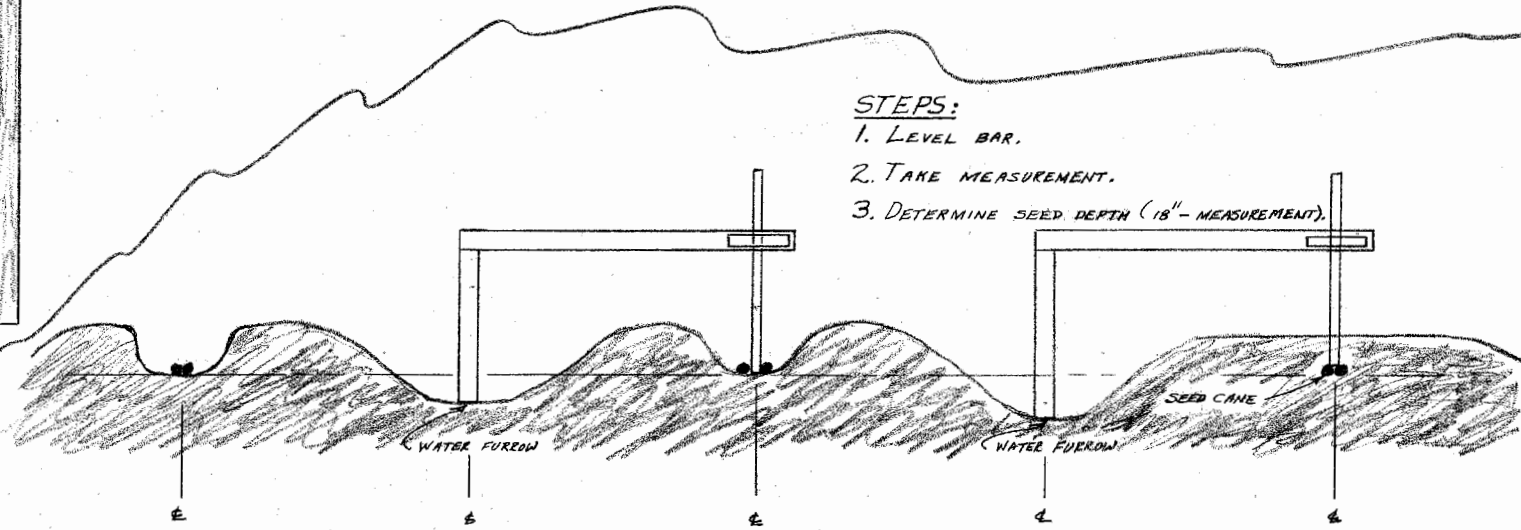

CROSS SECTION OF CANE ROWS



LOUSTEAU SEED CANE DEPTH GAGE

ENGINEER	E. J. L.	SCALE	
DRAWN BY	W. A. H.	SHEET	1 OF 1
TRACED BY		DATE	7/20/68 NO. 38-13

Disclaimer

This site makes available conceptual plans that can be helpful in developing building layouts and selecting equipment for various agricultural applications. These plans do not necessarily represent the most current technology or construction codes. They are not construction plans and do not replace the need for competent design assistance in developing safe, legal and well-functioning agricultural building system. The LSU Agriculture Center, the Mid-West Plan Service, the United States Department of Agriculture and none of the cooperating land-grant universities warranty these plans.